


ADVANTAGE DUAL

Blanket designed for sheet fed printing jobs where mixed ink systems are in use on the same press

APPLICATION	INK	
Sheetfed	●	UV ●
Heatset	●	Conventional ●
Coldset	●	Hybrid ●
Packaging	●	
Coating	●	● RECOMMENDED
Metal	●	● SUITABLE
Continuous F.	●	● NOT RECOMMENDED

COLOUR	Indigo
FACE COMPOUND	For UV and oxidation ink drying systems
CONSTRUCTION TYPE	Cord Carcass Compressible
SURFACE FINISH	Ground and polished
SURFACE ROUGHNESS, RA	0,60 – 0,90 µm
MICRO HARDNESS	68 +/- 3 IRHD
STRETCH	< 0,70 % at 500 N/5 cm
NOMINAL THICKNESS	1,95 mm (ISO 12636) 1,69 mm (ISO 12636)
GAUGE LOSS	≤ 0,02 mm
BOTTOM LAYER	Water/Solvent sealed
PACKING & TENSIONING	Conform to OEM instructions

STRUCTURE

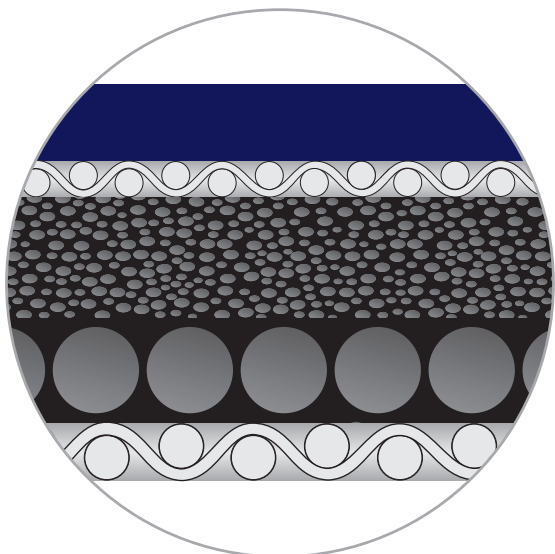

Printing surface
Fabric ply

Close cell compressible layer

Cord ply

Sealed bottom fabric

CHARACTERISTICS

Dimensional Stability

Closed Cell Compressible Layer

Microground Printing Surface

Sealed Bottom Layer

ADVANTAGES

Almost no sinking or stretching giving the blanket exceptional dimensional stability. After mounting no need for further re-tensioning thus leading to reduced down time.

New compressible layer coupled with the radial cord carcass improves durability, gives excellent shock absorption and rapid recovery. Resists solvent penetration, reduces the risk of delamination.

The specially formulated mix mode surface compound enables excellent ink transfer and dot reproduction on a wide range of paper/carton qualities. High resistance to swelling against non-aggressive UV drying inks and cleaning agents. Recommended for use with daylight fluorescent inks and metal-pigmented inks and for alternating operation with conventional, mineral-oil-based and UV inks.

Gives added protection from water and chemical penetration.



Savatech, d.o.o. • Industrial Rubber Products and Tyres
Škofjeloška c. 6 • 4000 Kranj • Slovenija • Tel + 386 (0)4 206 63 87 • Fax + 386 (0)4 206 64 00
info.print@sava.si • www.savatech.eu • www.savaprint.com