


# ADVANTAGE PLUS

Designed and formulated for wide range of sheet-fed presses for printing on all kinds of inks and paper/carton stocks

## APPLICATION INK

Sheetfed	●	UV	●
Heatset	●	Conventional	●
Coldset	●	Hybrid	●
Packaging	●		
Coating	●	RECOMMENDED	
Metal	●	SUITABLE	
Continuous F.	●	NOT RECOMMENDED	

## STRUCTURE

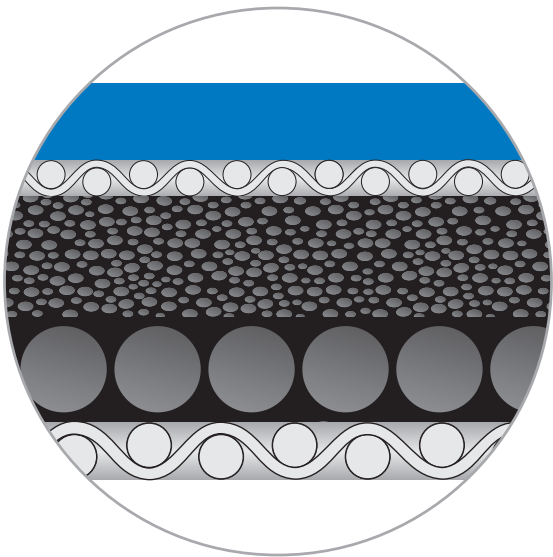

COLOUR	Blue
CONSTRUCTION	Cord Carcass
TYPE	Compressible
SURFACE FINISH	Ground and polished
SURFACE ROUGHNESS, RA	0,60 – 0,90 µm
MICRO HARDNESS	65 +/- 3 IRHD
STRETCH	< 0,70 % at 500 N/5 cm
NOMINAL THICKNESS	1,95 mm (ISO 12636) 1,69 mm (ISO 12636)
GAUGE LOSS	≤ 0,02 mm
BOTTOM LAYER	Water/Solvent sealed
PACKING & TENSIONING	Conform to OEM instructions

Printing surface  
Fabric ply

Close cell compressible layer

Cord ply

Sealed bottom fabric

## CHARACTERISTICS

Dimensional Stability

Virtually no sinking or stretching giving the blanket exceptional dimensional stability. After mounting no need for further re-tensioning thus leading to reduced down time.

Closed Cell Compressible Layer

New compressible layer coupled with the radial cord carcass improves durability, gives excellent shock absorption and rapid recovery. Resists solvent penetration, reduces the risk of de-lamination.

Microground Printing Surface

The specially formulated surface compound is specifically ground in order to ensure excellent ink transfer and dot reproduction on a wide range of paper/carton qualities.

Sealed Bottom Layer

Gives added protection from water and chemical penetration.

## ADVANTAGES



Savatech, d.o.o. • Industrial Rubber Products and Tyres  
Škofjeloška c. 6 • 4000 Kranj • Slovenija • Tel + 386 (0)4 206 63 87 • Fax + 386 (0)4 206 64 00  
info.print@sava.si • www.savatech.eu • www.savaprint.com