


STANDARDNO NAZUBLJENO KLINASTO REMENJE CLASSICAL-SECTION RAW EDGE V-BELTS

DIN 2215, ISO 4184


Profil Section	~b [mm]	~h [mm]
Y	6	4
X8	8	5
ZX	10	6
AX	13	8
BX	17	11
X20	20	12,5

Profil Section	Prodajni set (kom) Sellings Set (pcs)
Y	120
X8	100
ZX	80
AX	60
BX	50
X20	40

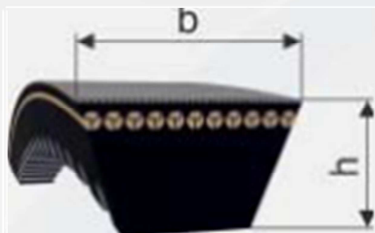

Profesionalna kvaliteta i pouzdanost s maksimalnom učinkovitošću i dugim vijekom trajanja

- Vrhunski omjer kvalitete i cijene.
- Izrazito dugi vijek trajanja.
- Minimalno rastezanje.
- Pogodni za remenice malih promjera.
- Pogodni za velik broj okretaja i velike snage.
- Najnoviji visokokvalitetni materijali.
- Precizna proizvodnja s kompjuterski upravljanim strojevima.
- Primjena suvremenih tehnologija u proizvodnom procesu.
- Otpornost na temperature od - 45 do + 80 °C.
- Povećana otpornost na mineralna ulja.
- Povećana otpornost na abraziju

Professional Quality and Reliability with Extra Efficiency and Long Life.

- Top performance/price ratio.
- Extra Long life.
- Minimal elongation.
- Suitable for small diameter pulley.
- Suitable for high revolutions and powers.
- The newest high quality materials.
- Precise manufacturing on computer driven production line.
- Modern technology of production process.
- Resistance to temperatures from -45 to +80 °C.
- Increased resistance to mineral oils.
- Increased resistance to abrasion.

Y		X8		ZX		AX		BX		BX	
Lw [mm]	Li [mm]	Lw [mm]	Li [mm]	Lw [mm]	Li [mm]	Lw [mm]	Li [mm]	Lw [mm]	Li [mm]	Lw [mm]	Li [mm]
465*	450	1079*	1060	992	970	900	870	558*	515	1363	1320
490*	475	1084	1065	997*	975	905	875	568*	525	1368	1325
515*	500	1094	1075	1002*	980	925	895	578*	535	1378	1335
545*	530	1139	1120	1022	1000	930	900	593*	550	1393	1350
555*	540	1149	1130	1032*	1010	950	920	608*	565	1413*	1370
575*	560	1169	1150	1052	1030	955	925	618*	575	1433	1390
595*	580	1179*	1160	1072*	1050	980	950	633*	590	1438	1395
615*	600	1189*	1170	1082*	1060	995	965	658*	615	1443	1400
645*	630	1199	1180	1092	1070	1000	970	668*	625	1493	1450
675*	660	1219	1200	1142	1120	1010*	980	683*	640	1518	1475
715*	700	1239	1220	1152	1130	1030	1000	703	660	1533	1490
755*	740	1244*	1225	1172	1150	1040*	1010	723	680	1543	1500
815*	800	1269	1250	1177*	1155	1050	1020	733*	690	1663	1620
825*	810	1314	1295	1182*	1160	1060	1030	743	700	1668	1625
865*	850	1319*	1300	1192*	1170	1080	1050	753	710	1718	1675
870*	855	1349	1330	1197*	1175	1090*	1060	783	740	1720	1677
		1364	1345	1202	1180	1100	1070	808	765	2483	2440
		1389*	1370	1217	1195	1105	1075	833*	790		
		1419	1400	1242	1220	1130	1100	843*	800		
		1489	1470	1247*	1225	1140	1110	858	815		
		1519	1500	1272	1250	1150	1120	878*	835		
		1639	1620	1317	1295	1155	1125	883*	840		
		1649	1630	1320	1298	1180	1150	888*	845		
		1714	1695	1322*	1300	1200	1170	908	865		
				1342	1320	1205	1175	930	887		
				1347	1325	1210	1180	933	890		
				1367	1345	1220	1190	943	900		
				1397*	1375	1230	1200	958	915		
				1422	1400	1245	1215	968	925		
				1497	1475	1250*	1220	987	944		
				1522	1500	1280	1250	993	950		
				1652	1630	1305	1275	1003	960		
				1722	1700	1320	1290	1013*	970		
						1330	1300	1037	994		
						1350	1320	1043	1000		
						1355	1325	1058	1015		
						1370	1340	1068	1025		
						1380	1350	1083*	1040		
						1400*	1370	1093	1050		
						1430	1400	1103	1060		
						1480	1450	11143	1100		
						1500	1470	1148	1105		
						1505	1475	1163	1120		
						1530	1500	1168	1125		
						1650	1620	1183	1140		
						1655	1625	1193	1150		
						1725	1695	1203*	1160		
								1213	1170		
								1218	1175		
								1228	1185		
								1243	1200		
								1248	1205		
								1253*	1210		
								1268	1225		
								1288	1245		
								1293	1250		
								1318	1275		
								1323	1280		
								1333*	1290		
								1343	1300		

X8		ZX		AX		X20	
Lw [mm]	Li [mm]	Lw [mm]	Li [mm]	Lw [mm]	Li [mm]	Lw [mm]	Li [mm]
469*	450	472*	450	505*	475	818	770
489*	470	497*	475	530*	500	898*	850
494*	475	522*	500	560*	530	903*	855
519*	500	530*	508	570*	540	923	875
549*	530	552*	530	590*	560	948	900
564*	545	562*	540	605*	575	968	920
579*	560	582*	560	630*	600	998	950
599*	580	602*	580	660*	630	1003	955
619*	600	622*	600	680*	650	1023*	975
649*	630	652*	630	720	690	1028*	980
669*	650	672*	650	740	710	1048	1000
689	670	692	670	770*	740	1058*	1010
714	695	717	695	805	775	1068	1020
719*	700	722*	700	830*	800	1098*	1050
729	710	732	710	845*	815	1103	1055
739	720	747	725	855	825	1108	1060
759*	740	762*	740	870*	840	1158	1110
769	750	772	750	880*	850	1168	1120
794	775	797	775	895	875	1198	1150
800	781	822*	800	922	900	1203*	1155
819*	800	837*	815	932	910	1223	1175
834*	815	847	825	947	925	1238	1190
844	825	872*	850	972	950	1263	1215
869*	850	882*	860	977*	955	1268*	1220
874*	855	897	875			1298	1250
894	875	922	900			1338	1290
919	900	932	910			1348*	1300
929	910	947	925			1368	1320
944	925	972	950			1388	1340
969	950	987	965			1418*	1370
974*	955					1448	1400
989	970					1508	1460
994*	975					1513*	1465
999*	980					1543	1495
1019	1000					1668	1620
1029*	1010					1738	1690
1049	1030					2498	2450
1069*	1050						

* Klasična verzija, nenazubljeni remeni. / * Plain version. Non cogged.