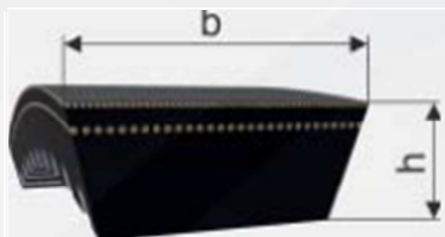


VARIJATORSKO NAZUBLJENO KLINASTO REMENJE

VARIABLE SPEED BELTS FOR MULTIPURPOSE USE

ISO 1604


Profil Section	~b [mm]	~h [mm]
W16	17	6
W20	21	7
22 x 8	22	8
25 x 8	25	8
W25	26	8
28 x 8	28	8
25 x 10	25	10
28 x 10	28	10
30 x 10	30	10
W 31,5	33	10
35 x 10	35	10
37 x 10	37	10
40 x 12	40	12
46 x 12	46	12
35 x 13	35	13
W 40	42	13
43,5 x 13	43,5	13
45 x 13	45	13
47 x 13	47	13
W 50	52	16
55 X 16	55	16
W 63	65	20

Profil Section	Prodajni set (kom) Sellings Set (pcs)
W16	50
W20	41
22 x 8	39
25 x 8	35
W25	34
28 x 8	31
25 x 10	35
28 x 10	31
30 x 10	27
W 31,5	27
35 x 10	25
37 x 10	24
40 x 12	22
46 x 12	20
35 x 13	25
W 40	21
43,5 x 13	20
45 x 13	19
47 x 13	19
W 50	17
55 X 16	16
W 63	13

Varijatorsko remenje za promjenjive brzine

- Profitabilan odnos cijene i kvalitete.
- Najnoviji visokokvalitetni materijali.
- Precizna proizvodnja s kompjuterski upravljanim strojevima.
- Primjena suvremenih tehnologija u proizvodnom procesu.
- Otpornost na temperature od – 45 do + 80 °C.
- Povećana otpornost na mineralna ulja.
- Povećana otpornost na abraziju

Variable Speed Belts for Multipurpose Use - They Work Reliably.

- Profitable performance/price ratio.
- The newest high quality materials.
- Precise manufacturing on computer driven production line.
- Modern technology of production process.
- Resistance to temperatures from -45 to +80 °C.
- Increased resistance to mineral oils.
- Increased resistance to abrasion.



35x13		W 40 (42x13)		43,5x13		W50 (52x16)	
Lw (mm)	Li (mm)	Lw (mm)		Lw (mm)	Li (mm)	Lw (mm)	
1000	940	980		1000	940	1000	
1020	960	1000		2010	960	1255	
1080	1020	1020		1120	1060	1320	
1120	1060	1055		1180	1120	1325	
1180	1120	1100		1250	1190	1400	
1250	1190	1120		1320	1260	1465	
1320	1260	1180		1400	1340	1480	
1400	1340	1240		1530	1470	1530	
1530	1470	1250		1560	1500	1700	
1560	1500	1320		1760	1700	2500	
1750	1690	1400		2500	2440		
1760	1700	1530					
2500	2440	1560					
		1600					
		1660					
		1750					
		1760					
		2500					
		45x13		47x13		55x16	
		Lw (mm)	Li (mm)	Lw (mm)	Li (mm)	Lw (mm)	Li (mm)
		800	740	1065	1000	1325	1250
		1000	940	1120	1055	1395	1320
		1020	960	1185	1120	1475	1400
		1120	1060	1245	1180	1575	1500
		1180	1120	1315	1250	1695	1620
		1250	1190	1385	1320		
		1320	1260	1465	1400	W63 (65x20)	
		1400	1340	1565	1500	Lw (mm)	Li (mm)
		1530	1470	1765	1700	1360	
		1560	1500			1600	
		1750	1690			1700	
		1760	1700			2120	
		2500	2440			2500	