


VIŠEREDNO KANALNO REMENJE ZA AUTOMOBILE (POLY V) AUTOMOTIVE MULTIPLE V-RIBBED BELT

DIN 7867, ISO 9981, ISO 9982

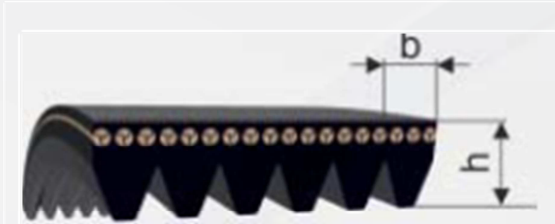

| Profil Section | ~b [mm] | ~h [mm] |
|----------------|---------|---------|
| PK | 3,56 | 5 |

| Profil Section | Prodajni set (kom) Sellings Set (pcs) |
|----------------|--|
| 3PK | 80 |
| 4PK | 60 |
| 5PK | 48 |
| 6PK | 40 |
| 7PK | 35 |
| 8PK | 31 |
| 9PK | 27 |
| 10PK | 25 |
| 11PK | 22 |
| 12PK | 20 |

| PK | PK | PK |
|---------|---------|---------|
| Le [mm] | Le [mm] | Le [mm] |
| 560 | 1015 | 1235 |
| 630 | 1045 | 1238 |
| 650 | 1050 | 1275 |
| 698 | 1053 | 1300 |
| 700 | 1054 | 1365 |
| 736 | 1060 | 1370 |
| 737 | 1070 | 1413 |
| 740 | 1115 | 1435 |
| 742 | 1125 | 1437 |
| 800 | 1127 | 1438 |
| 812 | 1130 | 1445 |
| 847 | 1137 | 1625 |
| 850 | 1141 | 1629 |
| 853 | 1145 | 1630 |
| 860 | 1150 | 1633 |
| 865 | 1152 | 1635 |
| 900 | 1163 | 1640 |
| 950 | 1165 | 1690 |
| 954 | 1170 | 1695 |
| 968 | 1180 | 1703 |
| 970 | 1220 | 1705 |
| 975 | 1225 | 1790 |
| 980 | 1226 | 1795 |
| 985 | 1230 | 1800 |
| 1005 | | |

Višeredno kanalno remenje za automobile – maksimalna snaga i dugotrajnost

- Izrazito dugi vijek trajanja.
- Minimalno rastezanje.
- Pogodni za remenice malih promjera.
- Pogodni za velik broj okretaja i velike snage.
- Najnoviji visokokvalitetni materijali.
- Precizna proizvodnja s kompjutorski upravljanim strojevima.
- Primjena suvremenih tehnologija u proizvodnom procesu.
- Otpornost na temperature od – 45 do + 80°C.
- Povećana otpornost na mineralna ulja.
- Povećana otpornost na abraziju

Multiple V-Ribbed Belts for Cars - Maximum Power and Life.

- Extra Long life.
- Minimal elongation.
- Suitable for very small diameter pulley.
- Suitable for high revolutions and powers.
- The newest high quality materials.
- Precise manufacturing on computer driven production line.
- Modern technology of production process.
- Resistance to temperatures from -45 to +80 °C.
- Increased resistance to mineral oils.
- Increased resistance to abrasion.