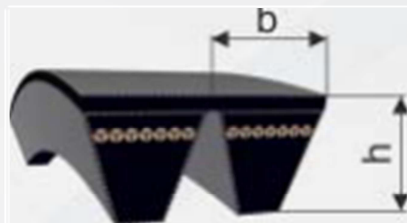


## VIŠEREDNO KLINASTO REMENJE ZA POLJOPRIVREDNE STROJEVE ZA VELIKA OPTEREĆENJA

### BANDED CLASSICAL WRAPPED V-BELTS

**DIN 2215, ISO 8419**


#### Pravo rješenje za velika opterećenja

- Profitabilan odnos cijene i kvalitete.
- Međusobno povezana konstrukcija ojačana poliesterskim ili aramidnim (Kevlar) nitima omogućuje prijenos velike snage
- Dugi vijek trajanja.
- Najnoviji visokokvalitetni materijali
- Precizna proizvodnja s kompjuterski upravljanim strojevima
- Primjena suvremenih tehnologija u proizvodnom procesu
- Električna vodljivost (ISO 1813).
- Otpornost na temperaturama od -30 do +80 °C pri relativnoj vlažnosti 65 +/-15 %.

#### DIN 2215

Profil Section	~b [mm]	~h [mm]	Pretvorba duljine Length Conversion
HB	16,5	15	Lw = La

#### ISO 8419

Profil Section	~b [mm]	~h [mm]	Pretvorba duljine Length Conversion
5V/15J	15	16	La = Le
8V/25J	25	26	La = Le

Profil Section	Raspon Lw duljina Range of Lw lengths	Prodajni set (kom) Sellings Set (pcs)
HB	1500 - 12500	44
HB RAVLEK	1500 - 12500	44
2-HB	1500 - 9300	22
2-HB RAVLEK	1500 - 12500	22
3-HB	1500 - 9300	14
3-HB RAVLEK	1500 - 12500	14
4-HB	1500 - 9300	10
4-HB RAVLEK	1500 - 12500	10
5-HB	1500 - 9300	8
5-HB RAVLEK	1500 - 12500	8
6-HB	1500 - 9300	6
6-HB RAVLEK	1500 - 12500	6
5V/15-J	1500 - 9300	48
2-15J	1500 - 9300	24
3-15J	1500 - 9300	16
4-15J	1500 - 9300	12
5-15J	1500 - 9300	8
6-15J	1500 - 9300	8
7-15J	1500 - 9300	6
8V/25-J	2800 - 12500	14
2-25J	2800 - 12500	7
3-25J	2800 - 12500	5
4-25J	2800 - 12500	3
5-25J	2800 - 12500	3

HB: DO 22-HB / UP TO 22- HB  
15J: DO 24-15J/ UP TO 24-15 J  
25J: DO 15-25J / UP TO 15-25 J

#### The Right Solution for Heavy Loads.

- Profitable performance/price ratio.
- Banded construction and polyester or aramid cable cord tension members allow transmission of high powers.
- Long life.
- The newest high quality materials.
- Accurate manufacturing on computer driven machines.
- Manufacturing on computer driven machines.
- Modern technology of production process.
- Electrically conductive (ISO 1813).
- Resistance to temperatures from -30 to +80 °C at relative humidity 65 +/-15 %.

Navedene duljine su primjeri. U navedenom rasponu dostupne su sve dužine.

The listed lengths are only examples. Any length is available in the mentioned range.

HB	HB	5V / 15J		5V / 15J		8V / 25J	
Le [mm]	Le [mm]	Inch	Le [mm]	Inch	Le [mm]	Inch	Le [mm]
1500	3650		5V 590 1500		5V 2120 5385		8V 1100 2800
			5V 600 1524		5V 2145 5450		8V 1120 2845
1550	3750		5V 610 1550		5V 2205 5600		8V 1140 2900
1600	3870		5V 630 1600		5V 2285 5800		8V 1180 2997
			5V 650 1650		5V 2240 5690		8V 1210 3070
1650	4000		5V 670 1702		5V 2360 5994		8V 1240 3150
			5V 690 1750		5V 2420 6150		8V 1250 3175
1700	4120		5V 710 1803		5V 2480 6300		8V 1280 3250
			5V 730 1850		5V 2500 6350		8V 1320 3353
1750	4250		5V 750 1905		5V 2560 6500		8V 1360 3450
			5V 770 1950		5V 2640 6700		8V 1400 3556
1800	4370		5V 790 2000		5V 2650 6731		8V 1435 3650
			5V 800 2032		5V 2715 6900		8V 1475 3750
1850	4500		5V 810 2060		5V 2795 7100		8V 1500 3810
			5V 835 2120		5V 2875 7300		8V 1525 3870
1900	4620		5V 850 2159		5V 2900 7366		8V 1575 4000
			5V 860 2180		5V 2955 7500		8V 1600 4064
1950	4750		5V 880 2240		5V 3000 7620		8V 1620 4120
			5V 900 2286		5V 3050 7750		8V 1675 4250
2000	4870		5V 905 2300		5V 3150 8001		8V 1700 4318
			5V 930 2360		5V 3350 8509		8V 1720 4370
2060	5000		5V 950 2413		5V 3550 9017		8V 1770 4500
			5V 995 2430		5V 3660 9300		8V 1800 4572
2120	5150		5V 895 2500				8V 1820 4620
			5V 1000 2540				8V 1870 4750
2180	5300		5V 1015 2580				8V 1900 4826
			5V 1045 2650				8V 1915 4870
2240	5450		5V 1060 2692				8V 1970 5000
			5V 1070 2720				8V 2000 5080
2300	5600		5V 1100 2800				8V 2030 5150
			5V 1120 2845				8V 2085 5300
2360	5800		5V 1140 2900				8V 2120 5385
			5V 1180 2997				8V 2105 5450
2430	6000		5V 1210 3070				8V 2205 5600
			5V 1240 3150				8V 2240 5690
2500	6150		5V 1250 3175				8V 2285 5800
			5V 1280 3250				8V 2360 5994
2580	6300		5V 1320 3353				8V 2420 6150
			5V 1360 3450				8V 2480 6300
2650	6500		5V 1400 3556				8V 2500 6350
			5V 1435 3650				8V 2560 6500
2720	6700		5V 1475 3750				8V 2640 6700
			5V 1500 3810				8V 2650 6731
2800	6900		5V 1525 3870				8V 2715 6900
			5V 1575 4000				8V 2795 7100
2900	7100		5V 1600 4064				8V 2800 7112
			5V 1620 4120				8V 2875 7300
3000	7300		5V 1675 4250				8V 2955 7500
			5V 1700 4318				8V 3000 7620
3070	7500		5V 1720 4370				8V 3050 7750
			5V 1770 4500				8V 3150 8001
3150	7750		5V 1800 4572				8V 3350 8509
			5V 1820 4620				8V 3550 9017
3250	8000		5V 1870 4750				8V 3750 9525
			5V 1900 4826				8V 4000 10160
3350	9300		5V 1915 4870				8V 4250 10795
			5V 1970 5000				8V 4500 11430
3450	12500		5V 2000 5080				8V 4750 12065
			5V 2030 5150				8V 4920 12500
3550			5V 2085 5300				